

# High-Temperature Supercritical Carbon Dioxide Coupled Receiver Analysis (CSP-1)



A joint India-U.S. research consortium funded under the *Joint Clean Energy Research & Development Center (JCERDC)*

## Scientific Achievement:

A new coupling method that combines optical, thermal-fluid, and structural analyses has been developed and implemented for the analysis of high-temperature pressurized receivers.

## Significance and Impact:

Previously, oversimplified models were used to analyze the solar receivers. This new methodology can provide a more detailed evaluation for the new generation of receivers.

## Research Details:


We developed a MATLAB script to couple SolTrace to ANSYS Fluent, which is then coupled to ANSYS Structural to complete the analysis.

- The script developed is used to build a boundary condition for the thermal-fluid analysis that contains the heat-flux data on the surface of the receiver obtained from the ray-tracing optical analysis.
- The resulting temperature distribution is transferred from ANSYS Fluent to ANSYS Structural to evaluate the structural integrity.
- This script has been used to analyze the receivers at Sandia National Labs, Indian Institute of Science (IISc), and Indian Institute of Technology (IIT-Bombay) and has been updated to enhance its performance.


## Publication(s):

J.D. Ortega, S.D. Khivsara, J.M. Christian, C.K. Ho, "Structural analysis of a directly heated tubular solar receiver for supercritical CO<sub>2</sub> Brayton cycle," *Proceedings of the 9<sup>th</sup> International Conference on Energy Sustainability (ES2015), San Diego, CA, 2015.*

J.D. Ortega, S.D. Khivsara, J.M. Christian, J.E. Yellowhair, C.K. Ho, Yellowhair, C.K. Ho, "Coupled optical-thermal-fluid modeling of a directly heated tubular solar receiver for supercritical CO<sub>2</sub> Brayton cycle," *Proceedings of the 9<sup>th</sup> International Conference on Energy Sustainability (ES2015), San Diego, CA, 2015.*

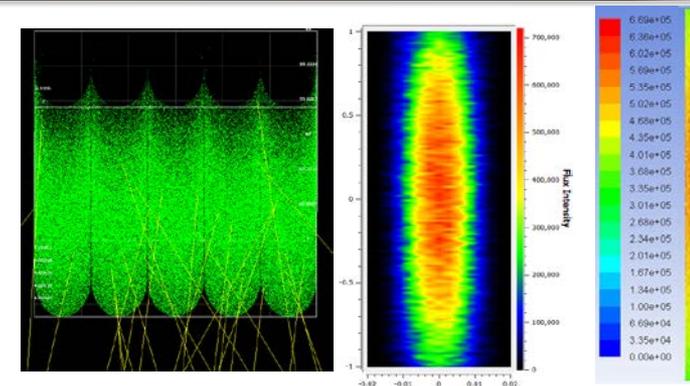

Left: SolTrace ray intersections on tubes. Middle: Heat-flux distribution on a single tube. Right: Heat-flux distribution used as boundary condition on the tubes in ANSYS Fluent.

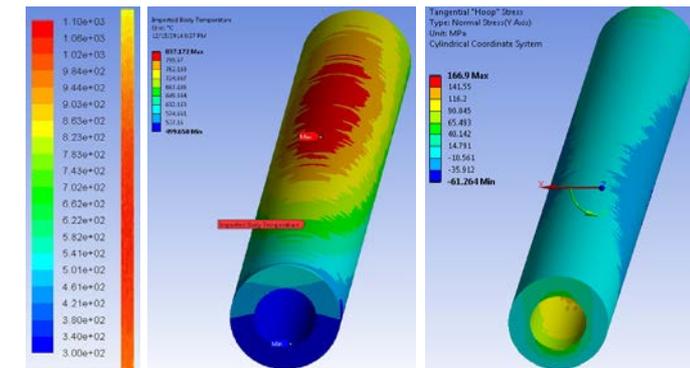

Left: Resulting temperature distribution on the tubes computed in ANSYS Fluent. Middle: Temperature distribution mapped on a tube in ANSYS Structural. Right: Resulting stresses computed in ANSYS Structural.

**Contact(s):** Jesus D. Ortega, [jdorte@sandia.gov](mailto:jdorte@sandia.gov); Sagar D. Khivsara, [sagardk@mecheng.iisc.ernet.in](mailto:sagardk@mecheng.iisc.ernet.in); Clifford K. Ho, [ckho@sandia.gov](mailto:ckho@sandia.gov); Joshua M. Christian, [jmchris@sandia.gov](mailto:jmchris@sandia.gov); Julius E. Yellowhair, [jeyello@sandia.gov](mailto:jeyello@sandia.gov)