

Introducing Cu_2O in $p-i-n$ Planar Perovskite Solar Cells (PV-3)



A joint India-U.S. research consortium funded under the *Joint Clean Energy Research & Development Center (JCERDC)*

Scientific Achievement:


Introduction of cuprous oxide (Cu_2O) thin films formed by Successive Ionic Layer Adsorption and Reaction (SILAR) method as a hole-transport layer in perovskite ($\text{CH}_3\text{NH}_3\text{PbI}_3$) solar cells. Formation of planar $p-i-n$ (direct) structure heterojunction perovskite solar cells positively modifies efficiency and reliability.

Significance and Impact:


Introduction of Cu_2O as an inorganic oxide hole-transport layer in perovskite solar cells resulted in a photo-conversion efficiency of over 8%. This offers a potential alternative to unstable and costly Spiro-MeOTAD in forming $p-i-n$ junction solar cells without a high work-function top electrode (gold).

Research Details:

- Demonstration of the formation of $\text{CH}_3\text{NH}_3\text{PbI}_3$ perovskite thin films by one-step solution approach and their characterization.
- Fabrication of $p-i-n$ structure with a perovskite absorber and Cu_2O and PCBM as a hole- and electron-transport layer.
- Estimation of the band-edges of the semiconductors by scanning tunneling spectroscopy to derive the energy band diagram.

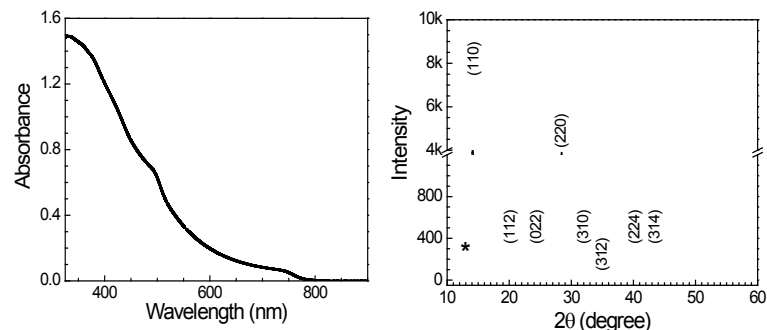

Absorbance spectrum (left) and X-ray diffraction pattern (right) of $\text{CH}_3\text{NH}_3\text{PbI}_3$ thin film.

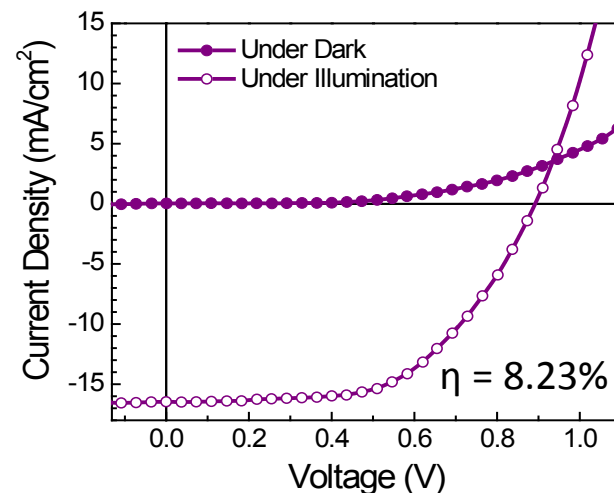

JV profile of heterojunction cells.

Contact: Amlan J. Pal (sspajp@iacs.res.in)

Publication: S. Chatterjee, A. J. Pal, Introducing Cu_2O thin-films as a hole-transport layer in efficient planar perovskite solar cell structures, *J. Physical Chemistry C* **120**, 1428–1437 (2016). DOI: [10.1021/acs.jpcc.5b11540](https://doi.org/10.1021/acs.jpcc.5b11540)



U.S. DEPARTMENT OF
ENERGY



NREL
NATIONAL RENEWABLE ENERGY LABORATORY



Sandia
National
Laboratories

STEP

