

# Technoeconomic Study of Solarized s-CO<sub>2</sub> Power Cycles (CSP-1)



A joint India-U.S. research consortium funded under the *Joint Clean Energy Research & Development Center (JCERDC)*

## Scientific Achievement:

Performed the first comprehensive technoeconomic analysis of alternative solar-driven supercritical CO<sub>2</sub> (s-CO<sub>2</sub>) power cycles.

## Significance and Impact:


Identified trade-offs in cost and performance among components in both concentrating solar power (CSP) and s-CO<sub>2</sub> power cycles to determine optimal configuration with lowest cost and greatest performance.

## Research Details:

- Higher cycle efficiencies (nearly 50%) resulting from recuperation reduce required thermal input and costs of heliostat field and receiver.
- Lower  $\Delta T$  across the primary heater (CSP source) resulting from recuperation increased required mass flow rate and costs of heat-transfer/storage media, but resulting cost increase was relatively small.
- Recuperated simple, recompression, and partial cooling s-CO<sub>2</sub> cycles yielded the lowest overall costs.

**Publication:** C. Ho, M. Carlson, P. Garg, and P. Kumar, "Cost and performance tradeoffs of alternative solar-driven supercritical CO<sub>2</sub> power cycles," *Proceedings of the ASME 2015 Power and Energy Conversion Conference*, San Diego, June 28–July 2, 2015.

**Contact:** Dr. Cliff Ho, [ckho@sandia.gov](mailto:ckho@sandia.gov)

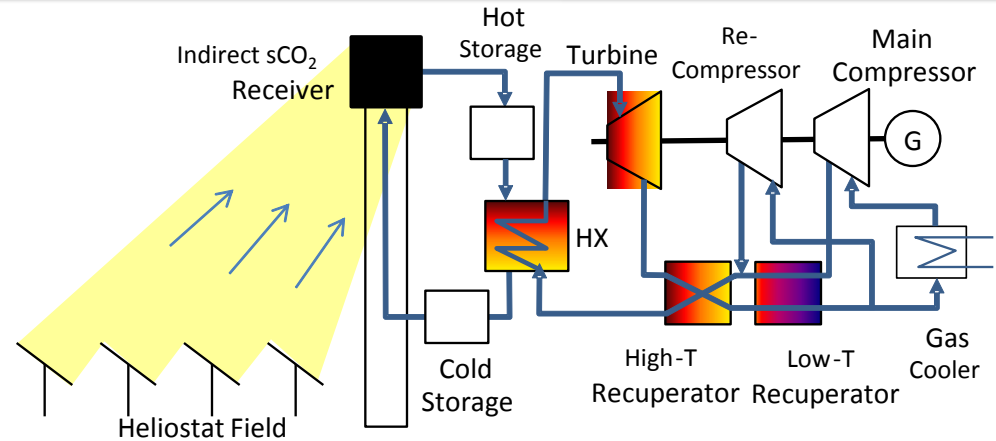

Solarized s-CO<sub>2</sub> recompression power cycle with thermal storage.

Table of solar and power block costs for alternative s-CO<sub>2</sub> power cycles.

SCBC = Simple Closed Brayton Cycle; RCBC = Recompression Closed Brayton Cycle; CCBC = Cascaded Closed Brayton Cycle; CBI = Combination Bifurcation with Intercooler

	SCBC	Recuperated SCBC	RCBC	CCBC	CBI
Concentrating Solar Costs (\$/kWe)	7,210	2,840	2,930	4,170	2,730
Power Block Costs (\$/kWe)	1,485	898	1,002	1,583	1,095
Total Costs (\$/kWe)	8,690	3,730	3,930	5,750	3,830

